

REV.	DESCRIPTION	DATE
A	RELEASE	Oct. 31, 2006
B	DRAW MODIFY	Oct. 18, 2007
C	DIM. & MATERIAL MODIFY	Jan. 10, 2008

### MATERIALS

- HOUSING : L.C.P (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE.
- SHELL : BRASS, NICKEL PLATING.

### SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : 0°C TO +50°C.
- DURABILITY : 5000 CYCLES.
- MATING FORCE : 0.51kgs MIN.
- UNMATING FORCE : 0.71 ~ 3.57kgs MAX.





### PART NUMBER INFORMATION :

22 - 26 05 A - 5 - \* T - R

SERIES CODE                      TYPE 05                      WITH MYLAR                      NUMBER OF POSITIONS

ENVIRONMENTAL PROTECTION CODE (RoHS)                      TIN PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS  
 1 : GOLD FLASH  
 2 : .000010" GOLD  
 3 : .000015" GOLD  
 5 : .000030" GOLD

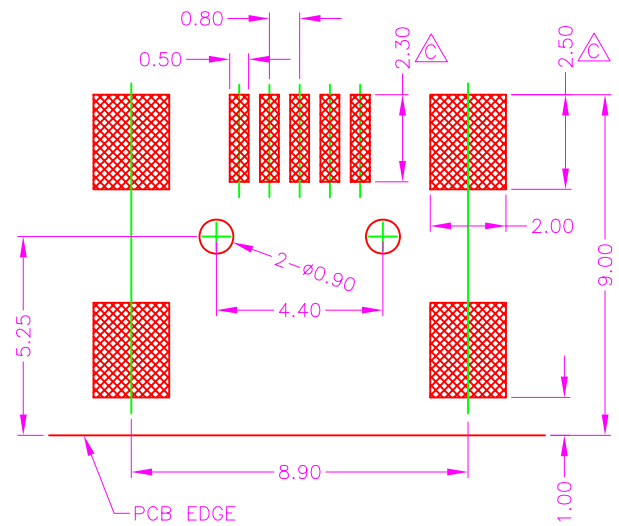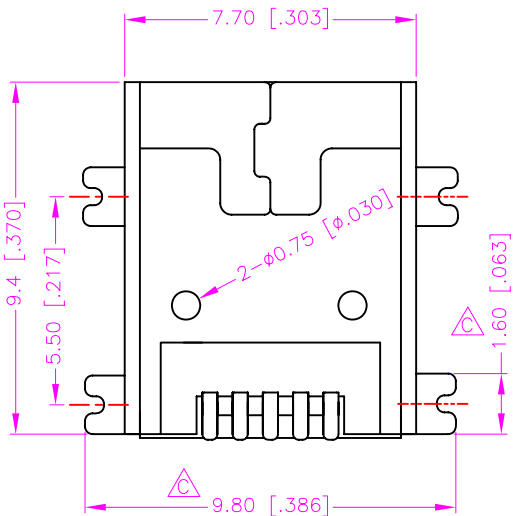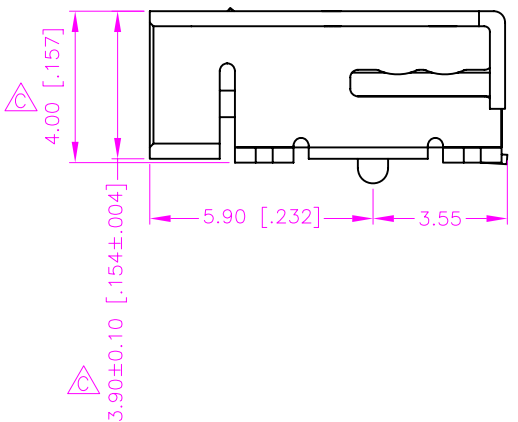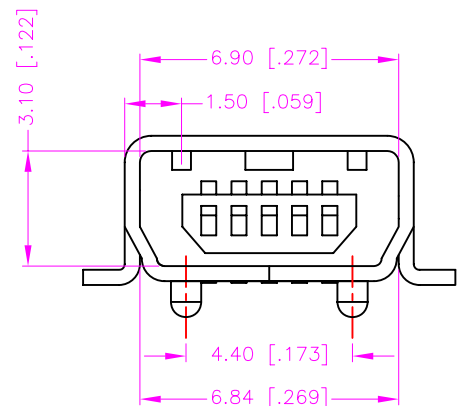

**RECOMMEND P.C.B. LAYOUT  
TOP VIEW**

TOLERANCE .0=±0.30 [.012] .00=±0.15 [.006] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>JANPE</i>	 <b>WWW.ASTRON.COM.TW</b> NAME MINI.-AB USB P.C.B. MOUNT, SMT METAL SHIELD, FEMALE DRAW NO. C22-2605A-5-XT-R
UNITS : mm [inch]	CHECK <i>B&amp;N</i>	
SCALE NONE	APP'D <i>BRPE</i>	
SIZE A4	PRODUCT SPEC.	
SHEET 1 OF 1	REV. C	03006