


CR2450

Items		Normal	Remark
Capacity	Typ.	540mA/h	
	Min.	530mA/h	
Voltage		3.0V	
Internal Resistance		≤ 7.5kΩ	
Power Off Voltage		2.0 V	
Charging Current			
Maximum Charging Voltage			
Charging Time			
Maximum Charging Current			
Maximum Disharge Current		3mA	
Approximate Weight		About 6.5g	
Operating Temperature and Humidity	Charging	no	
	Discharge	-20~+60℃	
Storage Temperature	<1 month	-20~+45℃	Recommended storage temperature is at 23℃
	>6 months	-20~+35℃	

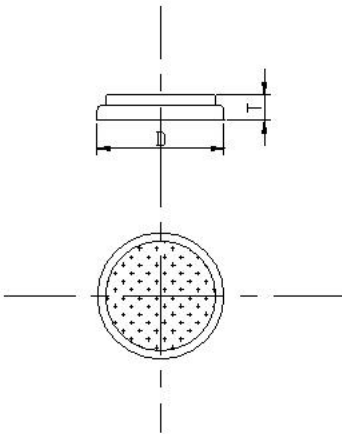

Demension	Unit
T (MAX)	5mm
D (MAX)	24.5mm

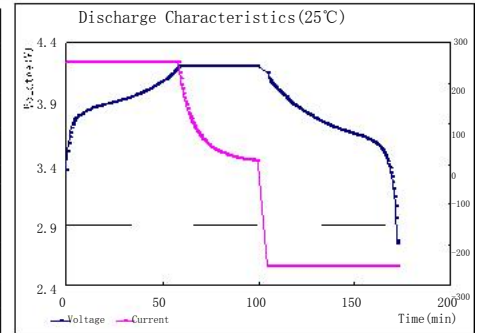


Figure 1 Discharge Characteristic

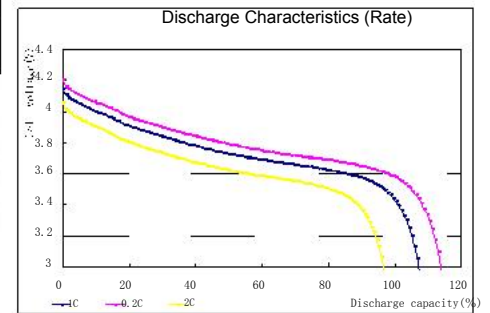


Figure 2 Discharge Characteristic

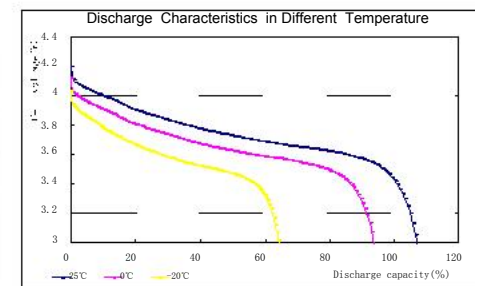


Figure 3 Discharge Characteristic in Different T




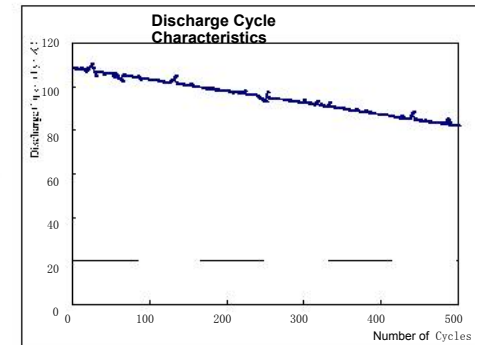


Figure 4 Discharge Cycle Characteristic



Battery outside Size : $\Phi 29.0 \pm 1 \times H 5.2 \pm 0.1 \text{ mm}$

L(Length of Pins) : $(5 \text{ mm}) \pm 1 \text{ mm}$

W(Width of Pins) : $(6.5 \text{ mm}) \pm 1 \text{ mm}$

d : $1 \pm 0.2 \text{ mm}$