
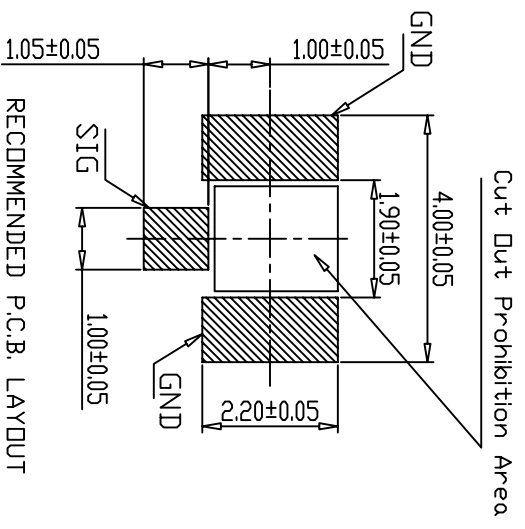
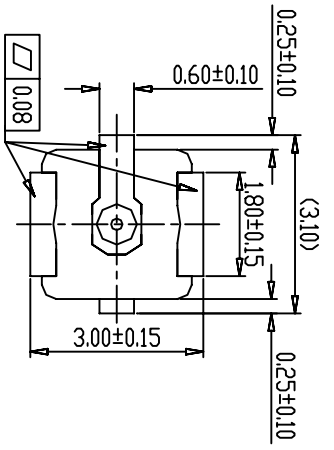


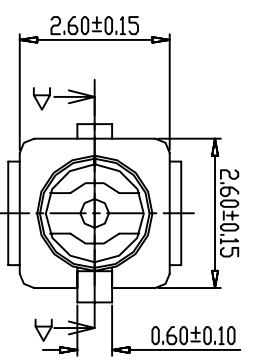



REV. A	DATE 2012/08/01	ECN NO. /	MODIFICATION NEW	APPROVER Vicky
--------	-----------------	-----------	------------------	----------------



Specifications:
Electrical:

- 1.Character Impedance: 50Ω
- 2.Rating Voltage: 60V AC
- 3.Contact Resistance
 - 3.1Inner Contact:25 mΩ max
 - 3.2Outer Contact:15 mΩ max
- 4.Withstanding Voltage: 200V AC 1min
- 5.Insulation Resistance:500MΩ
- 6.Operate Temperature: -40℃~+90℃
- 7.Operate Humidity: 95% max
- 8.Frequency Range: 0~6GHz

③	SHELL	1	COPPER ALLOY/Au PLATED OVER NI
②	CONTACT	1	COPPER ALLOY/Au PLATED OVER NI
①	HOUSING	1	HIGHT TEMP. PLASTIC UL94V-0/WHITE
ITEM PART NAME		QTY	MATERIAL/FINISH

GENERAL TOLERANCE		UNITS	mm
SELECT			
TOL	1	2	3
X.XXX	±0.10	±0.05	±0.15
X.XX	±0.15	±0.13	±0.25
X.X	±0.20	±0.25	±0.50
X.	±0.30	±0.38	±1.00
ANGLE	±2°		

NAME:	MMCX	TITLE:	深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
PART NO:	MXC3N2001	DWG NO.:	ATOM-A00580
APPD:	Vicky	SCALE:	1:1
CHKD:	Emilia	SHEET:	1/1
DR:	Doris	REV:	A

